

MAGNETIC SHUTTER SENSOR

PR-620

PR-630

PR-620



PR-630

WALL MOUNT • NEW DESIGN

FEATURES :

- Easy installation. Max. detective range: 80mm (PR-620) and 60mm (PR-630).
- Using magnetic modulation and no power supply is required.
- High reliable and stable sensor, uneasy to be interfered around.



● Patent Pending

MAGNETIC SHUTTER SENSOR

PR-620


PR-630

PR-620




INSTALLATION SITE :


● PR-620

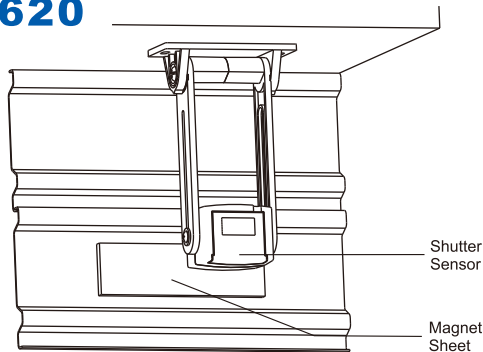

PR-630

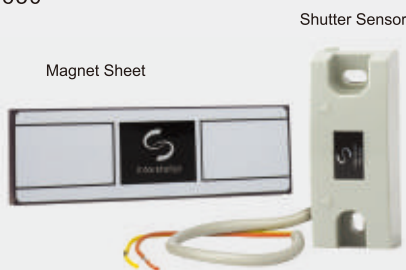

● PR-630

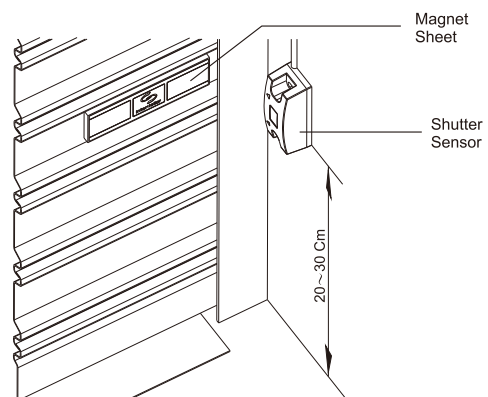

SPECIFICATIONS :


Model	PR-620	PR-630
Detection System	Magnetic Modulation	
Alarm Output	NO. 30V AC / DC 0.1A (max)	
Operating Temperature	-25°C ~ +55°C	
Mounting Position	Shutter indoor	
Detection Distance (mm)	3.15" (80 mm)(max)	2.36" (60 mm)(max)
Angle adjustment	Up-and-down 2.83"(72 mm) Front-and-behind ±90°C	
Wiring	Terminal	Wire
Weight	4.34 oz (123 grams)	2.82 oz (80 grams)
Dimensions (WxHxT)	3.15" x 5.04" x 1.26" (80 x 128 x 32 mm)	1.06" x 2.64" x 0.92" (27 x 67 x 23.3 mm)

● NOTICE


1. Sensor should keep safe distance from riser plate of the iron curled door, don't be incurred to collide or falling down result in broken.
2. PR-620 shutter surface should confront Magnet Sheet with 80mm (max) distance.
3. PR-630 shutter surface should confront Magnet Sheet with 60mm (max) distance.

DIMENSIONS :

PR-620

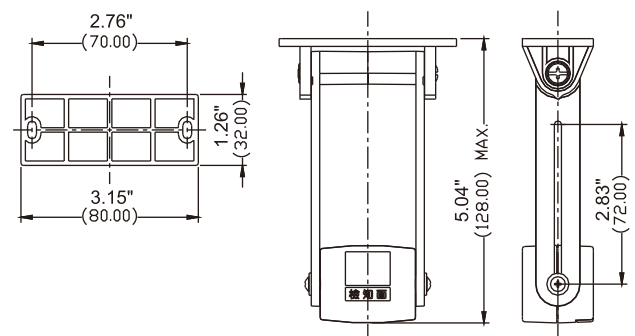

PR-630

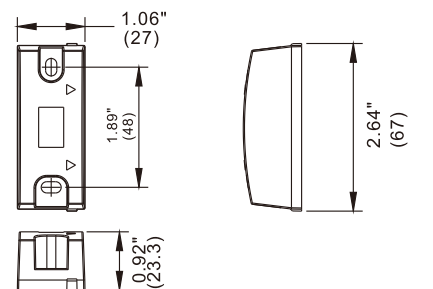

Unit : inch(mm)

No.CPR-620-0545